


90011030 SPOTLIGHT LED SAUNA BLACK
90011032 SPOTLIGHT LED SAUNA WHITE
90011034 SPOTLIGHT LED SAUNA ALU

Effekt Power	Material Material	Färgtemperatur Color temperature	Armaturfärg Fixture color	Anslutning Connection	Ljusflöde Luminous flux
4.3W	Aluminum	3000K	Black	230V	175lm

CE, ROHS, IP CERTIFIED BY SGS



Komihåg vid montering av downlight LED

Kontrollmät **ALLTID** diametern före håttagning i tak.
Antal watt per lampa x antalet lampor ger storleken
på transformator. Vid installation av LED följ **ALLTID**
kopplingschema.

OBS! Det är olika transformatorer på LED och halogen.

- 1-2W/kvm vid mjukare belysning normal takhöjd.
- 3-4W/kvm vid allmän belysning normal takhöjd.

LED är:

- Miljövänlig och energisnål.
- Lång livslängd, 20.000-50.000 timmar.
- Låg värmeutveckling, stötsäker.

Trivs bäst i kyla, ju lägre temperatur och god luftarea
desto bättre ljuseffekt. För ökad livslängd på LED-lampor
bör armaturer med kylfläns användas.

Tänk på att **ALDRIG** montera downlight direkt mot lättan-
tändligt material. Desto mer luftarea runt den monterade
downlighten, desto säkrare blir installationen. Ökad
luftarea ger längre livslängd på ljuskälla och armatur.

Things to remember when installing LED downlights

ALWAYS measure the diameter prior to perforation in
ceiling. The amount of Watt per light times the number of
lights equal the size of transformer. During installation of
LED, **ALWAYS** adhere to the circuit diagram.

N.B. Transformers differ for LED and halogen.




- 1-2W/square meter for softer lighting and standard ceiling height.
- 3-4W/square meter for ambient lighting and standard ceiling height.

LED is:


- Environmentally friendly and energy efficient.
- Long life expectancy, 20 000-50 000 hours.
- Low heat generation, shock resistant.

LED lights perform at best in cold, the lower the
temperature and the more air volume, the better the light
output. For increased longevity on LED lights, fixtures
with heat sinks should be used.


Remember to **NEVER** install a downlight directly adjacent
flammable materials. Sufficient air volume surrounding
the installed fixture provides a safer installation. In-
creased air volume increases life expectancy for both light
source and fixture.




1. Stäng av strömmen/Turn off the power

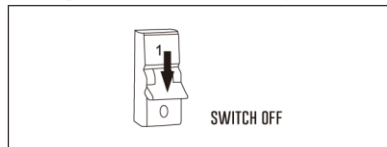

2. Borra hål i taket/Drill hole in ceiling

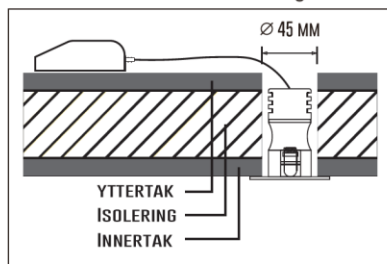

Montera ej över bastuaggregat/Do not 3. mount above sauna heater

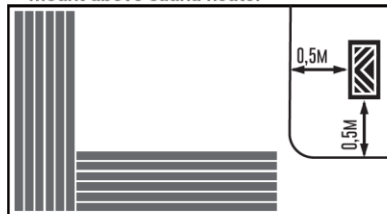

Mått/Dimension

